

TRANSMITTAL FORM FOR FILING PATENT APPLICATION

Attorney

Docket No.: SYNER-174XX

WEINGARTEN, SCHURGIN, GAGNEBIN & HAYES LLP
Ten Post Office Square
Boston, Massachusetts 02109
Telephone: (617) 542-2290
Telecopier: (617) 451-0313

Express Mail No: EL418427740US

Date: November 14, 2000

First Named Inventor or Application
Identifier: Carl John Lindeborg et al.

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith under 37 CFR § 1.53 for filing is the patent application of:

Inventor: Carl John Lindeborg, Mark David Moreau, Keith Louis Petry,
John Ernest Ziegler

Entitled: INTELLIGENT NETWORK TOPOLOGY AND CONFIGURATION VERIFICATION USING A
METHOD OF LOOP DETECTION

This is a request for filing a ☐ continuation ☐ divisional ☐ continuation
in-part application under §1.53(b) of prior Application No. _____, filed
_____ entitled:

Enclosed are:

☒ 24 pages of written description, claims and Abstract, inclusive

☒ 2 sheets of ☐ informal ☒ formal drawings of Figs. 1-2 (one set)

☒ Oath or Declaration

☒ Newly executed (original or copy)

☐ Copy from prior application (37 CFR 1.63(d)) (for continuation/divisional).

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Unsigned (To be filed later)

☒ Cover sheet and Assignment of the invention to: 3Com Corporation

☐ Certified copy of a _____ application (if foreign priority is claimed) with letter claiming priority under Rule 55.

☐ Information Disclosure Statement with _____ citations

☐ Preliminary amendment is enclosed.

☒ Return receipt postcard

☐ Small entity status is entitled to be, and hereby is, asserted for this application.


11/14/00
JCS3 U.S. PTO

JCS16 U.S. PTO
09/12610
11/14/00

Attorney Docket No.: SYNER-174XX

TRANSMITTAL FORM FOR FILING PATENT APPLICATION (CONTINUED)

- ☐ Other: _____
- ☐ Priority is claimed under 35 USC § 120 as indicated on the attached sheet 4.
- ☐ Priority is claimed under 35 USC §119(a)-(d) as indicated on the attached sheet 4.
- ☐ Priority is claimed under 35 USC §119 (e) as indicated on the attached sheet 4.
- ☒ David A. Daggs is hereby appointed Associate Attorney by:
Registration No.: 37,809


Attorney of Record Victor B. Lebovici
Registration No.: 30,864

- ☐ Power of Attorney in the originally-filed application has been granted to one or more of the registered attorneys listed below. The attorneys listed below not previously granted power in the originally-filed application, as well as _____, are hereby given associate power:
Registration No.: _____

Stanley M. Schurgin, Reg. No. 20,979
Charles L. Gagnebin III, Reg. No. 25,467
Paul J. Hayes, Reg. No. 28,307
Victor B. Lebovici, Reg. No. 30,864

Eugene A. Feher, Reg. No. 33,171
Beverly E. Hjorth, Reg. No. 32,033
Holliday C. Heine, Reg. No. 34,346
Gordon R. Moriarty, Reg. No. 38,973

- ☐ Cancel in this application original claims _____ of the prior application before calculating the filing fee.
- ☐ Add in this application claims _____ per amendment before calculating fee.

CLAIMS FILED:	MINUS BASE:	EXTRA CLAIMS:	RATE:	BASIC FEE:
				\$710.00
Independent	3 - 3	= 0	x \$80.00 =	\$0.00
Total	27 - 20	= 7	x \$18.00 =	\$126.00
<input type="checkbox"/> Multiple Dependent Claims (1st presentation)			+ \$270.00 =	
SUBTOTAL FILING FEE				\$836.00
Small Entity filing, divide by 2. (Small Entity status must be asserted.)				\$0.00
TOTAL FILING FEE				\$836.00

Attorney Docket No.:SYNER-174XX

TRANSMITTAL FOR FILING PATENT APPLICATION (CONTINUED)

- [X] The filing fee has been calculated above; a check in the amount of \$836.00 is enclosed.
- [] The filing fee will be submitted at a later date.
- [X] In the event a Petition for Extension of Time under 37 CFR §1.17 is required by this paper and not otherwise provided, such Petition is hereby made and authorization is provided herewith to charge Deposit Account No. 23-0804 for the cost of such extension.
- [X] The Commissioner is hereby authorized to charge payment of any additional filing fees under 37 CFR §1.16 associated with this communication or credit any overpayment to Deposit Account No. 23-0804.

[X] Customer Number 207

Address all future communications to:

WEINGARTEN, SCHURGIN, GAGNEBIN & HAYES LLP
Ten Post Office Square
Boston, Massachusetts 02109
Telephone: (617) 542-2290
Telecopier: (617) 451-0313

David A. Daggs
Attorney of Record: David A. Daggs
Registration No. 37,809

Attorney Docket No.: SYNER-174XX

TRANSMITTAL FOR FILING PATENT APPLICATION (CONTINUED)

[] Priority is claimed under 35 USC § 120 of prior Application(s)
No. _____, filed _____, entitled:

[] The above-identified application(s) is/are assigned of record to:

[] Priority is claimed under 35 USC § 119 (a)-(d) of the following application(s).

_____ (Application Number)	_____ (Country)	_____ (Filing Date)
-------------------------------	--------------------	------------------------

_____ (Application Number)	_____ (Country)	_____ (Filing Date)
-------------------------------	--------------------	------------------------

_____ (Application Number)	_____ (Country)	_____ (Filing Date)
-------------------------------	--------------------	------------------------

[] The above-identified application(s) is/are assigned of record to:

[] Priority is claimed under 35 USC § 119 (e) of the following provisional application(s).

_____ (Application Number)	_____ (Filing Date)
-------------------------------	------------------------

_____ (Application Number)	_____ (Filing Date)
-------------------------------	------------------------

_____ (Application Number)	_____ (Filing Date)
-------------------------------	------------------------

[] The above-identified provisional application(s) is/are assigned of record to:

SUBMIT IN TRIPLICATE

TITLE OF THE INVENTION

Intelligent Network Topology and Configuration Verification
Using a Method of Loop Detection

5

CROSS REFERENCE TO RELATED APPLICATIONS

N/A

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR

10

DEVELOPMENT

N/A

BACKGROUND OF THE INVENTION

15

The present invention relates generally to configuring the topology of a communications network, and more specifically to a system and method for detecting and eliminating network loops connected to a bridge device installed in a networking hub.

20

As it is generally known, in a local area network (LAN) using a protocol such as Ethernet or Token Ring, devices referred to as "nodes" compete for the ability to use a shared communications path to exchange messages referred to as "data units" or "frames." However, if too many nodes consistently attempt to transmit simultaneously, the overall performance of the network may potentially be affected, even to the point of bringing communications over the network to a near halt. To make this possibility less likely, large LANs are often divided into two or more LAN segments

25

connected by one or more networking devices referred to as "bridges." In such a configuration, each data unit is received by any bridge or bridges connected to the LAN segment on which the data unit originated. Each bridge then
5 determines which segment or segments the received data unit should be forwarded to, and only forwards the data unit to that segment or segments. In this way, data units transmitted between nodes within a single segment are isolated from other segments, thus reducing traffic on those
10 other segments.

A bridge determines which LAN segments to forward a received data unit onto based on destination address information within the data unit and a data structure reflecting the locations of nodes within the various
15 interconnected LAN segments, referred to as the forwarding table or forwarding tables of the bridge. Each bridge learns where specific nodes are located by examining the MAC source addresses of data units it receives, and by forming associations between those MAC source addresses and the
20 segments on which the data units containing them were received. In the case where a data unit is received having a destination address for which no destination segment is known, a bridge typically broadcasts that data unit onto all segments to which it is connected, to ensure that the data
25 unit is received at its intended destination node. This approach is generally referred to as "transparent bridging", which is performed by a "learning bridge." Transparent bridging is advantageous in that it does not require setup of the forwarding tables by a network administrator.

30 A known problem relating to the use of bridge technology is the need to avoid what are referred to as "broadcast storms." Broadcast storms may occur when bridges

are connected in a physical loop, which results in a logical loop sometimes referred to as a "bridge loop." A bridge loop occurs when data units can travel from a first LAN segment to a second LAN segment through more than one path.

5 In order to eliminate bridge loops, existing bridge devices typically employ a technique referred to as the spanning tree algorithm. The spanning tree algorithm is implemented by bridges interchanging special messages known as Bridge Protocol Data Units ("BPDUs"). The specific format of BPDUs
10 is described in IEEE 802.1. The spanning tree algorithm calls for various specific types of BPDUs to be sent by bridges to a special multicast address that is received by all bridges.

The spanning tree algorithm includes steps to (1) elect
15 a single bridge from the connected bridges to be the "root" bridge, (2) calculate a best path distance to the "root" bridge from each other bridge, (3) identify a "designated bridge" for each LAN segment that will be used for forwarding packets towards the root bridge, (4) choose a
20 port on each bridge that gives the best path towards the root, and (5) select ports to be included within the spanning tree. Using the bridge elected as a root bridge for reference, the spanning tree algorithm operates to switch one of any two bridges forming a physical loop in the
25 network into a standby mode, so that only one side of a potential bridge loop passes traffic. By listening to configuration update BPDUs, a bridge in the standby mode can switch automatically from standby mode into forwarding mode in the event that the other bridge forming the physical loop
30 fails. The spanning tree protocol thus ensures that physical loops in the network topology do not result in logical looping of network traffic.

While the spanning tree algorithm has proven generally effective in eliminating bridge loops, implementing the spanning tree algorithm on relatively low cost bridging devices may be prohibitively costly. For example, hardware logic necessary to perform the spanning tree algorithm typically includes a spanning tree state register for each port in a bridge. The value stored in such a state register maintains a current spanning tree state for the associated port. In a bridge device supporting the spanning tree algorithm, a spanning tree state register is necessary for each port in the device, since the value of the register effects forwarding decisions made by the bridge. Accordingly, in a bridge device designed for relatively low cost applications, but containing a significant number of ports, hardware circuitry to provide a spanning tree state register for each port may add undesirable costs to the overall design. Additionally, it may be desirable in some circumstances to limit the network topologies which may be connected to a given port or ports of a relatively low cost bridging device. For example, in the case where a bridging device is designed for relatively small network configurations, it may include a relatively small forwarding table. It would be undesirable for large, complex networks, having large numbers of nodes, to be attached to a port of such a device. Accordingly, it may be desirable to have a system which further operates to prevent the attachment of large, complex networks to one or more ports of a relatively low cost bridging device.

For the reasons stated above, it would be desirable to have a system for avoiding bridge loops and the potential broadcast storms which may result from them, but which does not require the relatively costly implementation of the

spanning tree algorithm within a relatively low cost bridge device. The system should further be applicable to bridge devices wishing to limit the types of topologies which are connected to one or more of their external ports.

5

BRIEF SUMMARY OF THE INVENTION

In accordance with disclosed invention, a system and method are disclosed for detecting and preventing bridge loops in a relatively low cost bridge type device designed for installation within a network hub. The network hub in which the bridge type input/output module is to be installed further includes a switching fabric, which may be integral to the network hub, or removably installed within the network hub. The switching fabric in the network hub is operable to forward data units among a plurality of input/output modules installed in the network hub, including a bridge type input/output module. The switching fabric utilizes an intra-hub communication path to perform forwarding of the data units among the input/output modules installed in the network hub. A spanning tree protocol controller operates on behalf of the switching fabric to forward bridge protocol data units on the intra-hub communication path. The spanning tree protocol controller may be implemented using hardware and/or software components appropriate for a particular embodiment of the system. Accordingly, the spanning tree algorithm functions performed by the spanning tree protocol controller may be performed by some combination of program code executing on an embedded microprocessor subsystem, or hardware circuits such as one or more Application Specific Integrated Circuits (ASICs) within the spanning tree algorithm controller.

One or more of the disclosed bridge type input/output modules may be installed within the network hub. Each bridge type input/output module includes hardware and/or software implemented logic which operates to monitor the

5 intra-hub communication path of the network hub to detect any bridge protocol data units transmitted by the switching fabric. When an initial bridge protocol data unit is detected on the intra-hub communications path by one of the bridge type input/output modules, the bridge type

10 input/output module stores a MAC source address of the data unit, and forwards the data unit onto its external communication ports, which are coupled to respective network segments. The bridge type input/output module then monitors its external communication ports to detect a data unit

15 having a destination address matching the bridge multicast address used to transmit bridge protocol data units.

When a data unit having a destination address matching the bridge multicast address is detected, the bridge type input/output module compares a MAC (Media Access Control)

20 source address of that data unit to the previously stored MAC source address from the bridge protocol data unit detected on the intra-hub communication path. In the event that the MAC source address of the data unit detected on the external communication port matches the previously stored

25 MAC source address, the bridge type input/output module disables operation of the respective one of its external communication ports at which the data unit was received.

In one example of how the disclosed system can be extended, the bridge type input/output device further

30 operates to prevent relatively complex network topologies from being connected to one or more of its external communications ports by monitoring those external

communications ports for routing protocol messages. In such an extended system, in the event that a routing protocol message is detected on one of those external communications ports, the bridge type input/output module disables the
5 port. By disabling a port which receives a routing protocol message, this example of an extension to the disclosed system prevents network topologies which include routers, and which therefore are likely to be relatively large and contain many nodes, from being connected to its external
10 ports.

In this way there is provided a system and method for detecting and eliminating bridge loops which are appropriate for use in relatively low cost bridge type input/output modules. The disclosed system does not require the
15 relatively costly implementation of spanning tree algorithm capability within the low cost bridge device. The system is further applicable to bridge devices wishing to limit the types of topologies which are connected to one or more of their external communication ports. The disclosed system
20 may therefore be advantageously employed in bridges which have relatively limited forwarding table resources, in order to reduce the likelihood that very complex networks having large numbers of nodes will be connected to any of the external communications port of the bridge. Additionally,
25 because the disclosed system does not require implementation of the spanning tree algorithm within the bridge, significant savings in terms of hardware and/or software complexity and functionality may be obtained through its use.

30

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The invention will be more fully understood by reference to the following detailed description of the invention in conjunction with the drawings, of which:

Fig. 1 is a logical block diagram showing a number of bridge type input/output modules within a network hub; and

Fig. 2 is a flow chart illustrating steps performed by an illustrative embodiment of the disclosed system.

DETAILED DESCRIPTION OF THE INVENTION

As depicted in Fig. 1, in an illustrative embodiment of the disclosed system, a network hub 10 includes a switching fabric 14, a number of bridge type I/O modules, shown as bridge A 16, bridge B 18 and bridge C 19, and point to point connections 12, 13 and 15 interconnecting the bridge type I/O modules to the switching fabric 14. The point to point connections 12, 13 and 15 each terminate at one of backplane ports 21, 25 and 27 within a respective one of the bridge type I/O modules 16, 18 and 19. In this way, the point to point connections 12, 13 and 15 form a star wired backplane. The star wired backplane illustrated by point to point connections 12, 13 and 15 in Fig. 1 is referred to herein as the "backplane".

Each of the bridge type I/O modules in the network hub 10 of Fig. 1 includes a number of external communication ports, shown as external communication ports 17 in bridge A 16. Each of the external communication ports of the bridges shown in Fig. 1 may be coupled to an end station or respective local area network (LAN) segment. Respective external communication ports of bridge A 16 are shown, for

purposes of illustration, coupled to a personal computer 20, and two local area networks (LAN 1 22 and LAN 2 24).

The external communication ports of the bridges shown in Fig. 1 may be implemented to support various communication media and protocols. For example, one or more of the external communication ports 17 in bridge A may support the Ethernet protocol. Further, one or more of the external communication ports 17 in bridge A 16 may support the Token Ring protocol. In general, the external communication ports of the bridges shown in Fig. 1 may be implemented to support any physical media and associated communications protocol for which bridging functionality may be provided.

The bridges within the network hub 10 function, for example, as what are generally referred to as "learning" bridges. Accordingly, the bridges in the network hub 10 operate to forward data units they receive, in cooperation with the switching fabric 14, onto selected ones of their external communication ports, as well as to other bridges within the network hub 10. Consistent with existing bridge protocols, forwarding by the bridges shown in Fig. 1 is performed using the Media Access Control (MAC) layer of addressing information in each data unit. Each of the bridges shown in Fig. 1 employs a forwarding table describing the location of nodes on the network segments to which the bridge is connected. The network topology reflected by such forwarding tables is developed through examination by the bridges of MAC source address information within received data units on their external communication ports.

The switching fabric 14 operates to forward data units among the bridges within the network hub 10. The switching

fabric 14 further includes spanning tree algorithm functionality. In this regard, the spanning tree functionality of the switching fabric 14 operates in part to transmit bridge protocol data units (BPDUs) across the backplane, in order for the BPDUs to be transmitted out of the external communication ports of the bridges installed within the network hub 10. For purposes of illustration, the BPDUs generated by the switching fabric 14 follow the format defined in the IEEE 802.1d MAC Bridge Management protocol standard. Accordingly, the BPDUs generated by the switching fabric 14 include a MAC destination address equal to the Bridge Group Address defined for use in BPDUs in connection with IEEE 802.1d. This Bridge Group Address is a multicast address that is recognized by all IEEE 802.1 bridge devices. The switching fabric 14 may further include a network management entity, which is responsible for collecting and reporting status and maintenance information related to the network hub 10.

The switching fabric and bridges of Fig. 1 may be implemented using hardware and/or software based control logic. For example, each of the switching fabric and the bridges of Fig. 1 may include a high speed path for data unit forwarding, implemented primarily in hardware, that is designed to maintain a relatively high data unit throughput. Additionally, the switching fabric and the bridges of Fig. 1 may each include a lower speed data unit processing path, for example implemented using software or microcode executing on a microprocessor based subsystem, for handling network management and other relatively low throughput functions.

The backplane which serves as an intra-hub communications path in the illustrative embodiment of Fig. 1

may be implemented using any appropriate backplane interconnection technology which permits digitized data to be communicated between the various bridge input/output modules and the switching fabric 14. In this regard, each
5 of the bridges and the switching fabric in the network hub 10 includes interface logic, associated with the respective one of the backplane ports 21, 25 and 27, which is operable to receive and transmit information using the backplane, such as the backplane consisting of point to point
10 connections 12, 13 and 15 shown in Fig. 1.

Fig. 2 illustrates steps performed in connection with an embodiment of the disclosed system. A bridge input/output module, such as the bridge input/output module 16 of Fig. 1, monitors a backplane within a network hub,
15 such as the star wired backplane shown in Fig. 1, for one or more bridge protocol data units transmitted from the switching fabric 14 within the network hub 10, as shown in Fig. 1. For example, detection of bridge protocol data units may be performed at each respective one of the
20 backplane ports 21, 15 and 27 (Fig. 1) by comparing the MAC layer destination address of a data unit with a predetermined destination address, such as the Bridge Group Address associated with IEEE 802.1. When a data unit is detected on the backplane having a MAC destination address
25 equal to such a predetermined destination address, the bridge input/output module determines that the data unit is a bridge protocol data unit, as shown in step 42.

Next, at step 44, the backplane port of the bridge input/output module stores the MAC source address of the
30 bridge protocol data unit detected at step 42. In the case where the switching fabric of the network hub is the entity within the network hub that is transmitting bridge protocol

5

10

15

data unit was detected at step 50. In this way, the bridge input/output module breaks the loop that it has detected in the network topology connected to that external communications port. Additionally, the bridge input/output module discards the bridge protocol data unit detected at step 50 in the case where the MAC source address of the bridge input/output module detected at step 50 matches the MAC address of the bridge protocol data unit detected on the backplane, such that it is not forwarded over any of the external communication ports of the bridge input/output module or the backplane of the network hub.

The disabling performed at step 54 may be performed in a variety of specific ways. Any type of disabling mechanism may be used that is effective in breaking the detected bridge loop. For example, the bridge input output module may operate to turn off or shut down the communications port such that no data units may be received or transmitted with regard to that port. A communications port that has been shut down may subsequently be re-enabled through an appropriate network management system.

At step 56 the bridge input/output module notifies a management entity regarding the disabling of the communications port at step 54. For example, the bridge input/output module passes a Simple Network Management Protocol (SNMP) message to a management entity associated with the network hub. Such a management entity may, for example, consist of software executing on the switch fabric within the network hub. The notification may be passed through any appropriate communications mechanism, for example by way of the backplane within the network hub.

In order to maintain a correct value of the source MAC address stored at step 44, the bridge input/output module

may, in an illustrative embodiment, clear the stored value periodically. After the stored value is cleared, the bridge input/output module then operates to detect a subsequent bridge protocol data unit transmitted over the backplane, and to store the MAC source address of that data unit.

The present system may be extended to further limit the types of network topologies which may be connected to the external communication ports of the bridge input/output module. For example, the disclosed system may be extended such that one or more of the external communication ports of the bridge input/output module are configured to monitor data units it receives for router protocol data units. Illustrative routing protocols include the RIP (Routing Information Protocol) layer 4 protocol, which uses the well known UDP (User Datagram Protocol) port 520, and OSPF (Open Shortest Path First) protocol, which uses an IP protocol ID of 89. In the event a router protocol data unit is detected at one of the external communication ports of the bridge input/output module, the bridge input/output module operates to disable that communication port, and to notify an associated management entity that the communication port has been disabled. This feature effectively prevents a router device from being connected to a network segment which is coupled to one of the external communication ports of the bridge input/output module. Since connection of a router to a network segment is typically an indication of a larger, more complex network topology for that network segment, preventing connection of a router effectively limits the complexity of the network segment. Since a less complex network segment will generally involve fewer nodes, the number of nodes which must be supported by the bridge input/output module for the associated external

communication port is thereby effectively reduced in many cases.

Those skilled in the art should readily appreciate that the programs defining the functions of the bridge
5 input/output module and switching fabric of the disclosed network hub can be implemented in and delivered to a specific embodiment of the disclosed system in many forms; including, but not limited to: (a) information permanently stored on non-writable storage media (e.g. read only memory
10 devices within a computer such as ROM or CD-ROM disks readable by a computer I/O attachment); (b) information alterably stored on writable storage media (e.g. floppy disks and hard drives); or (c) information conveyed to a computer through communication media for example using
15 baseband signaling or broadband signaling techniques, including carrier wave signaling techniques, such as over computer or telephone networks via a modem. In addition, while the functionality of the bridge input/out modules and/or switching fabric may be embodied in computer
20 software, these functions may alternatively be embodied in part or in whole using hardware components such as Application Specific Integrated Circuits or other hardware, or some combination of hardware components and software.

While the invention is described through the above
25 exemplary embodiments, it will be understood by those of ordinary skill in the art that modification to and variation of the illustrated embodiments may be made without departing from the inventive concepts herein disclosed. Accordingly, the invention should not be viewed as limited except by the
30 scope and spirit of the appended claims.

CLAIMS

What is claimed is:

- 5 1. A method for preventing bridge loops in a network topology, comprising:
 - monitoring an intra-hub communication path of a network hub to detect a first data unit on said intra-hub communication path having a destination address matching a first predetermined address;
 - 10 storing a source MAC address of said detected first data unit;
 - forwarding said detected first data unit onto a plurality of external communication ports;
 - 15 monitoring said plurality of external communication ports to detect a second data unit having a destination address matching said first predetermined address received at a respective one of said plurality of external communication ports;
 - 20 comparing a source MAC address of said second detected data unit to said stored source MAC address; and
 - in the event that said source MAC address of said second detected data unit matches said stored source MAC address, disabling operation of said respective one of said plurality of external communication ports at which said second detected unit was received.
 - 25
2. The method of claim 1, wherein said predetermined destination address is a media access control layer bridge
30 multicast address.

3. The method of claim 1, further comprising discarding said detected second data unit without any forwarding of said detected second data unit over any of said plurality of external communication ports.

5

4. The method of claim 1, further comprising sending a message to a network management entity indicating that said one of said plurality of external communication ports has been disabled.

10

5. The method of claim 4, wherein said sending of said message comprises sending said message to a network management entity within said network hub.

15

6. The method of claim 1, wherein said detected first data unit and said detected second data unit are bridge protocol data units.

20

7. The method of claim 1, further comprising periodically clearing said stored copy of said source MAC address of said detected first data unit.

25

8. The method of claim 1, further comprising:
monitoring said plurality of external communication ports to detect a data unit of a predetermined type; and
in the event that a data unit is detected of said predetermined type, disabling a respective one of said plurality of external communication ports at which said detected data unit of said predetermined type was received.

30

9. The method of claim 8, wherein said step of monitoring said plurality of external communication ports to detect a

data unit of said predetermined type comprises monitoring said plurality of external communication ports to detect a router protocol data unit.

- 5 10. Apparatus for eliminating loops in a network comprising:
a bridge type input/output module having a plurality of external communication ports and an intra-hub interface for communicably coupling said module with a switching fabric within a network hub, said input/output module including a
10 controller operable to:

monitor said intra-hub interface to detect a first data unit having a destination address matching a first predetermined address;

- 15 store a source MAC address of said detected first data unit;

forward said detected first data unit onto said plurality of external communication ports;

- monitor said plurality of external communication ports to detect a second data unit received at a
20 respective one of said plurality of external communication ports and having a destination address matching said first predetermined address;

- compare a source MAC address of said second detected data unit to said stored source MAC address;
25 and

- in the event that said source MAC address of said second detected data unit matches said stored source MAC address, disable operation of said respective one of said plurality of external communication ports at
30 which said second detected unit was received.

11. The apparatus of claim 10, wherein said predetermined destination address is a media access control layer bridge multicast address.

5 12. The apparatus of claim 10, wherein said bridge type input/output module is further operable to discard said detected second data unit without any forwarding of said detected second data unit over any of said plurality of external communication ports.

10

13. The apparatus of claim 10, wherein said bridge type input/output module is further operable to send a message to a network management entity, said message indicating that said one of said plurality of external communication ports
15 has been disabled.

14. The apparatus of claim 13, wherein said bridge type input/output module is further operable to send said message by sending said message to a network management entity
20 within said network hub.

15. The apparatus of claim 10, wherein said detected first data unit and said detected second data unit are bridge protocol data units.

25

16. The apparatus of claim 10, wherein said bridge type input/output module is further operable to periodically clear said stored copy of said source MAC address of said detected first data unit.

30

17. The apparatus of claim 10, wherein said bridge type input/output module is further operable to:

monitor said plurality of external communication ports to detect a data unit of a predetermined type; and

- in the event that a data unit is detected of said predetermined type, disable a respective one of said plurality of external communication ports at which said detected data unit of said predetermined type was received.

18. The apparatus of claim 17, wherein said bridge type input/output module is further operable to monitor said plurality of external communication ports to detect a data unit of said predetermined type by monitoring said plurality of external communication ports to detect a router protocol data unit.

19. A system for preventing bridge loops in a network topology, comprising:

- a switching fabric installed in a network hub, said switching fabric operable to forward data units among a plurality of input/output modules also installed in said network hub;

- a spanning tree protocol controller installed within said switching fabric, said spanning tree protocol controller operable to forward bridge protocol data units on an intra-hub communication path;

- at least one bridge type input/output module installed in said network hub, said bridge type input/output module operable to

- monitor said intra-hub communication path of said network hub to detect a first one of said bridge protocol data units transmitted by said switching fabric,

store a source MAC address of said detected first data unit,

forward said detected first data unit onto a plurality of external communication ports of said bridge type input/output module,

monitor said plurality of external communication ports to detect a second data unit having a destination address matching said first predetermined address received at a respective one of said plurality of external communication ports,

compare a source MAC address of said second detected data unit to said stored source MAC address, and

in the event that said source MAC address of said second detected data unit matches said stored source MAC address, disabling operation of said respective one of said plurality of external communication ports at which said second detected unit was received.

20. The system of claim 19, wherein said predetermined destination address is a media access control layer bridge multicast address.

21. The system of claim 19, wherein said at least one bridge type input/output module installed in said network hub is further operable to discard said detected second data unit without any forwarding of said detected second data unit over any of said plurality of external communication ports.

22. The system of claim 19, wherein said at least one bridge type input/output module installed in said network hub is further operable to send a message to a network management

entity indicating that said one of said plurality of external communication ports has been disabled.

23. The system of claim 22, wherein said at least one bridge
5 type input/output module installed in said network hub is operable to send said message by sending said message to a network management entity within said network hub.

24. The system of claim 19, wherein said detected first data
10 unit and said detected second data unit are bridge protocol data units.

25. The system of claim 19, wherein said at least one bridge
type input/output module installed in said network hub is
15 further operable to periodically clear said stored copy of said source MAC address of said detected first data unit.

26. The system of claim 19, wherein said at least one bridge
type input/output module installed in said network hub is
20 further operable to:

monitor said plurality of external communication ports to detect a data unit of a predetermined type; and
in the event that a data unit is detected of said predetermined type, disable a respective one of said
25 plurality of external communication ports at which said detected data unit of said predetermined type was received.

27. The system of claim 26, wherein said at least one bridge
type input/output module installed in said network hub is
30 operable to monitor said plurality of external communication ports to detect a data unit of said predetermined type

comprises by monitoring said plurality of external communication ports to detect a router protocol data unit.

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2

ABSTRACT OF THE DISCLOSURE

A system and method are disclosed for detecting and preventing bridge loops in a relatively low cost bridge module designed for installation in a network hub. The bridge operates to monitor an intra-hub communication path of the network hub to detect bridge protocol data units transmitted by a switching fabric within the network hub. The bridge module stores a MAC source address of a bridge protocol data unit detected on the intra-hub communications path, and forwards the bridge protocol data unit through its external communication ports to respective network segments. The bridge module monitors its external communication ports for any data unit having a destination address matching a bridge multicast address. When a data unit having a destination address matching the bridge multicast address is detected, the bridge module compares the MAC source address of that data unit to the previously stored MAC source address from the bridge protocol data unit detected on the intra-hub communication path. In the event that the MAC source address of the data unit detected on the external communication port matches the previously stored MAC source address, the bridge module disables operation of the respective one of its external communication ports at which the data unit was received. In one embodiment of the disclosed system, the bridge module further monitors its external communications ports for routing protocol messages. In the event that a routing protocol message is detected on one of those external communications ports, the bridge module disables that port.

228915

ATTORNEY DOCKET NO. SYNER-174XX
WEINGARTEN, SCHURGIN,
GAGNERIN & HAYES, LLP
TEL. (617) 542-2290
FAX. (617) 451-0313

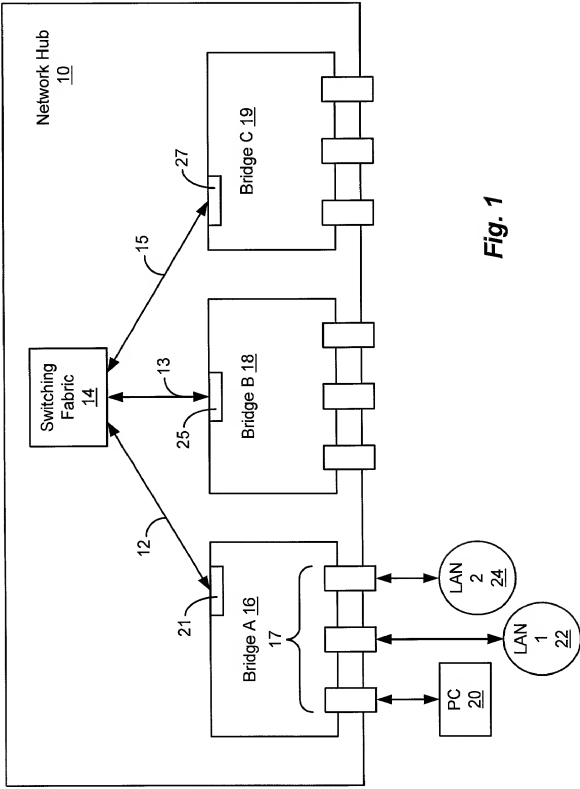
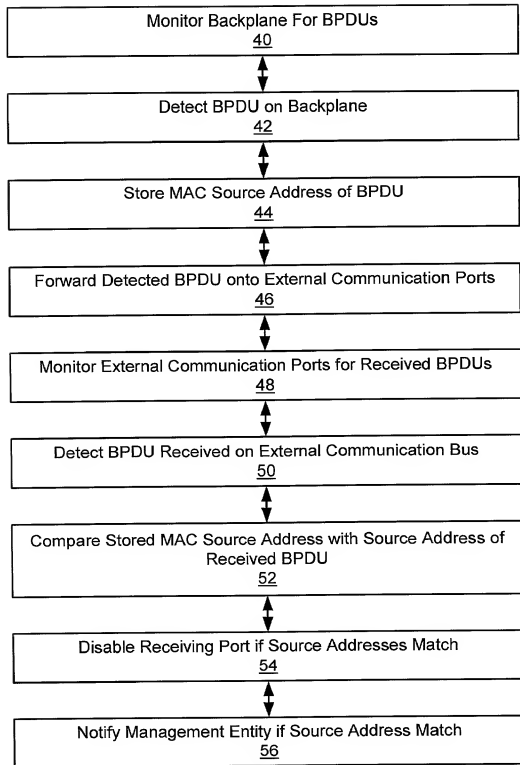


Fig. 1

**Fig. 2**

DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **INTELLIGENT NETWORK TOPOLOGY AND CONFIGURATION VERIFICATION USING A METHOD OF LOOP DETECTION**

the specification of which (check one):

[X] is attached hereto. [] was filed _____ as Application No. _____
amended on _____ (if applicable).

[] was filed as PCT International Application No. _____ on _____,
and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

I hereby claim foreign priority benefits under Title 35, USC §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>		<u>Date Filed</u>	<u>Priority Claimed</u>	
(Number)	(Country)	(Day/Month/Year)	[] Yes	[] No
(Number)	(Country)	(Day/Month/Year)	[] Yes	[] No

I hereby claim the benefit under Title 35, USC §119(e) of any United States provisional application(s) listed below:

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

Express Mail Number

86418427740US

Attorney
Docket No.: SYNER-174XX

I hereby claim the benefit under Title 35 USC §120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 USC §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application No.)	(Filing Date)	(Patented/pending/abandoned)
-------------------	---------------	------------------------------

(Application No.)	(Filing Date)	(Patented/pending/abandoned)
-------------------	---------------	------------------------------

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) to prosecute this application and transact all business connected therewith in the Patent and Trademark Office, and to file with the USPO any International Application based thereon.

Stanley M. Schurgin, Reg. No. 20,979

Charles L. Gagnebin III, Reg. No. 25,467

Paul J. Hayes, Reg. No. 28,307

Victor B. Lebovici, Reg. No. 30,864

Eugene A. Feher, Reg. No. 33,171

Beverly E. Hjorth, Reg. No. 32,033

Holliday C. Heine, Reg. No. 34,346

Gordon R. Moriarty, Reg. No. 38,973

Address all correspondence to:

WEINGARTEN, SCHURGIN, GAGNEBIN & HAYES LLP
Ten Post Office Square
Boston, Massachusetts 02109
Telephone: (617) 542-2290
Telecopier: (617) 451-0313

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Carl John Lindeborg		
City of Residence Shrewsbury	State or Country Massachusetts	Country of Citizenship USA
Post Office Address 60 Hillando Drive	City Shrewsbury	State or Country Zip Code Massachusetts 01545
Signature: (Please sign and date in permanent ink.) X <i>Carl J. Lindeborg</i>		Date signed: X 11/8/2000

Attorney

Docket No.: SYNER-174XX

Full Name of Second Joint Inventor: Mark David Moreau		
City of Residence New Bedford	State or Country Massachusetts	Country of Citizenship USA
Post Office Address 968 Pine Hill Drive	City New Bedford	State or Country Zip Code Massachusetts 02745
Signature: (Please sign and date in permanent ink.) X <i>Mark D. Moreau</i>		Date signed: X 11/7/00

Full Name of Third Joint Inventor: Keith Louis Petry		
City of Residence Southborough	State or Country Massachusetts	Country of Citizenship USA
Post Office Address 4 General Henry Knox Road	City Southborough	State or Country Zip Code Massachusetts 01772
Signature: (Please sign and date in permanent ink.) X <i>Keith L. Petry</i>		Date signed: X 11/7/00

Full Name of Fourth Joint Inventor: John Ernest Ziegler		
City of Residence Westborough	State or Country Massachusetts	Country of Citizenship USA
Post Office Address 23 Smith Street	City Westborough	State or Country Zip Code Massachusetts 01581
Signature: (Please sign and date in permanent ink.) X <i>JEZ</i>		Date signed: X 11/9/00